



HandiTap

Activation

Vertical, Touch-activated Push Pads

Rugged and durable with a long slim profile design to facilitate automated building access for people of all mobility levels



RELIABLE

Weather resistant with a smooth, curved touch surface allowing for activation from a wide range of angles

WIRELESS FOR EASE OF INSTALLATION

Can be radio-controlled with the addition of an optional miniature remote control receiver

DURABLE


Made from anodized, extruded aluminium with sloped ABS end-caps

AVAILABLE IN TWO LENGTHS

Available in 91.5cm (36") or 23cm (9") lengths that are 10cm (4") wide

HandiTap

Activation

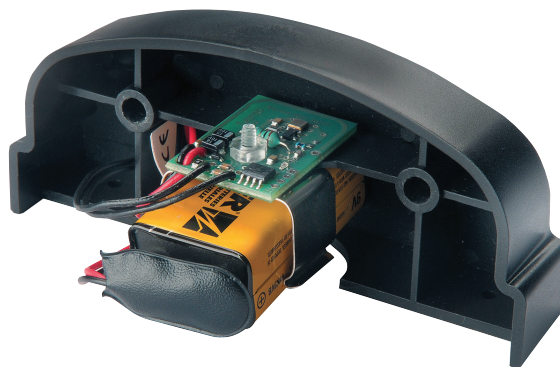

Technical Specifications


Models	9"	36"
Overall Dimensions (w x h x d)	4.28" x 10.68" x 1.82"	4.28" x 37.68" x 1.82"
Activation Area	4" x 9"	4" x 36"
Material	6063-T5 Aluminium Alloy	
Finishes	Clear Anodized – Blue Graphic Dark Bronze Anodized (305M) – White Graphic	
Switch	Momentary SPST (1-N.O, 1-N.C) UL® & CSA Listed	
Electrical Power	12 - 24 VAC/VDC - Hardwired, 9 VDC (battery) - Wireless Transmitter	
Operating Temperature	-40°C to +60°C, (-40°F to +140°F)	
Operating Temperature with Transmitter	-20°C to +55°C, (-4°F to +122°F)	
Graphic	Wheelchair Logo/Press to Open	

Range Available

Part Number	Range Available
36V1N00	91.5cm (36") Vertical Wall Switch
36V1N400	91.5cm (36") Vertical Wall Switch with 433 MHz Transmitter
9V1N00	23cm (9") Vertical Wall Switch
9V1N400	23cm (9") Vertical Wall Switch with 433 MHz Transmitter

Associated Accessories

Ultra-small 433MHz Receiver
433MHz-RX



Ultra-small 433MHz Replacement Receiver
433MHz-TX

