



## HR400-IND

Activation + Safety

## Industrial Door Activation & Pedestrian Safety

Door activation with pedestrian safety in one sensor at mounting heights of up to 4.7m



### TIMELY DOOR OPENING

Large adjustable detection area ensures timely door opening

### OPTIMIZE PEDESTRIAN SAFETY

High density infrared safety curtain protects pedestrians from dangerous door closures

### ELIMINATE DOOR/GOODS DAMAGE

Infinity presence timer prevents door closures on static objects left in the door close zone

### REDUCE BUILDING ENERGY LOSS


Uni-directional detection technology reduces building energy losses by as much as 20%

# HR400-IND

Activation + Safety



## Detection Area inches / millimetres

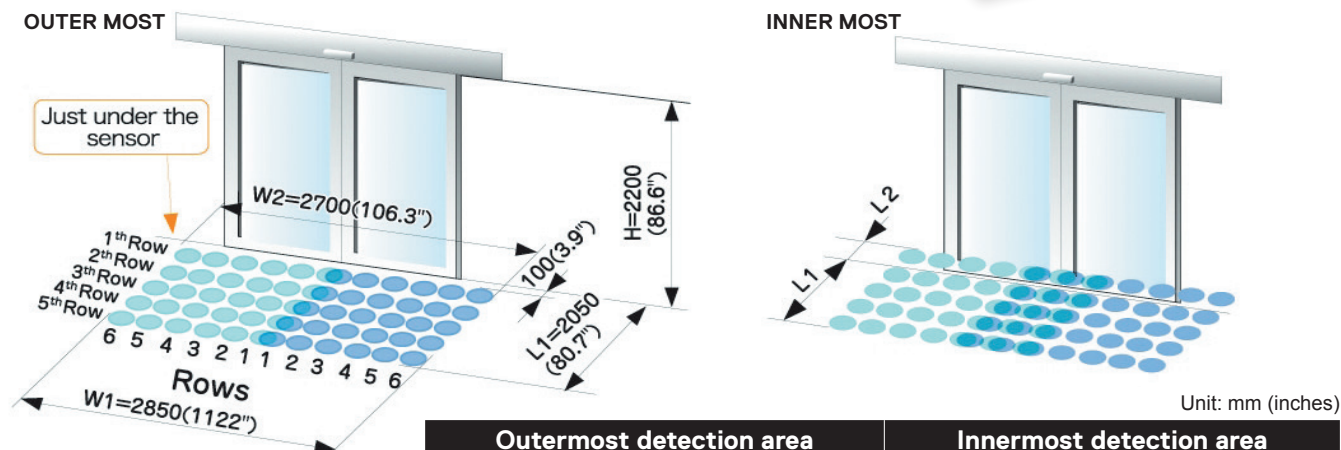

Outermost detection area				Innermost detection area			
H	W1	W2	L1	W1	W2	L1	L2
2000 (78.7")	2590 (102.0")	2450 (94.5")	1860 (73.2")	2180 (85.8")	2360 (92.9")	1130 (44.4")	-500 (19.7")
2200 (86.6")	2850 (112.2")	2700 (106.3")	2050 (80.7")	2400 (94.5")	2600 (102.4")	1250 (49.2")	-550 (21.7")
2500 (98.4")	3230 (127.2")	3060 (120.5")	2330 (91.7")	2720 (107.1")	2950 (116.1")	1420 (55.9")	-620 (24.4")
3000 (118.1")	3880 (152.8")	3680 (144.9")	2790 (109.8")	3270 (128.7")	3540 (139.4")	1700 (66.9")	-750 (29.5")
3500 (137.8")	4530 (178.4")	4290 (168.9")	3260 (128.4")	3810 (150.0")	4130 (162.6")	1980 (78.0")	-870 (34.3")
4000 (157.5")	5180 (203.9")	4900 (192.9")	3720 (146.5")	4360 (171.7")	4720 (185.8")	2260 (89.0")	-1000 (39.4")

## Technical Specifications

Model	HR400-IND Industrial Door Activation + Safety
Detection Method	Active Infrared Detection
Installation Height	Max 2000mm to 4700mm (8ft to 15ft)
Sensor Dimensions	265mm (W), 61mm (H), 37.5mm (D)
Pattern Adjustment	Width Adjustment: Wide or Narrow Pattern (Side Dials) Depth Adjustment: Sensor body angle 0° to 15° in 5 steps Depth Adjustment: 2 to 5 rows of detection (Dip Switch)
Presence Timer	2s / 60s / 10m / ∞
IP Rating	54
Power Supply	12 to 24V AC or DC ± 10%
Power Consumption	AC12V-2.5[VA], DC12V-140[mA] AC24V-2.5 [VA], DC24V-65 [mA]
Output Relay	Relay contact: Form 1C Relay DC 50V, 0.1A (Resistor Load)
Relay Hold Time	Approx. 0.5 sec
Operating Temperature	-20°C to +60°C, (-4°F to 140°F)
Weight	290g (0.64 lbs)
Available Colours	Black or Silver
Accessories Provided	8m Connection Cable, Mounting Template, Mounting Screws, Installation Instructions

## Associated Accessories

Under Mount Bracket  
UTB



Black Weather Cover  
WC\_IR/BL



Hotron 8M cable  
5 PIN  
CAB-8m



Internal Mounting Bracket  
HA-130

