

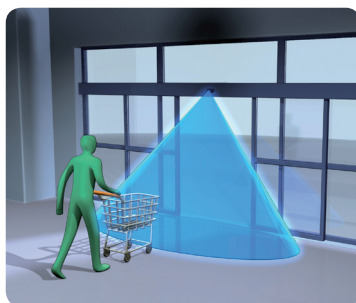


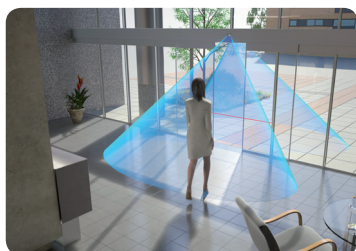

HR900

Activation

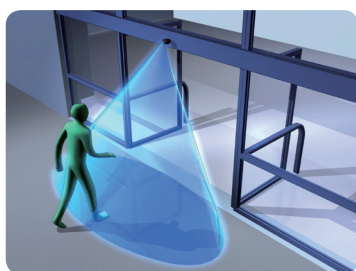

Slim Automatic Door Activation Sensor

MINIATURE

A slim 45mm(H) x 130mm(L) profile ensures HR900 looks smart on the slimmest door drive.

UNIVERSAL

Utilises a low power 24GHz radar module that allows use on automatic doors worldwide. US FCC 15.245 compliant.

LARGE, ADJUSTABLE DETECTION AREA

Adjustable, 4m(W) x 2m(D) detection area when installed at a height of 2.3m.


ENERGY SAVING

Uni-directional detecting technology reduces door hold open time and minimises building energy losses.

HR900


Activation

Dimensions

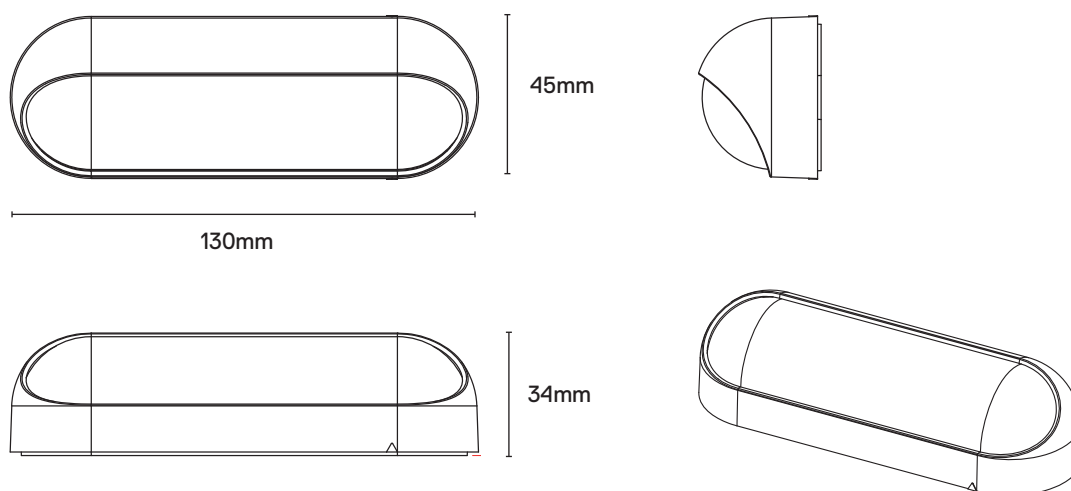

Detection Area

Install height 2.3m, minimum angle setting

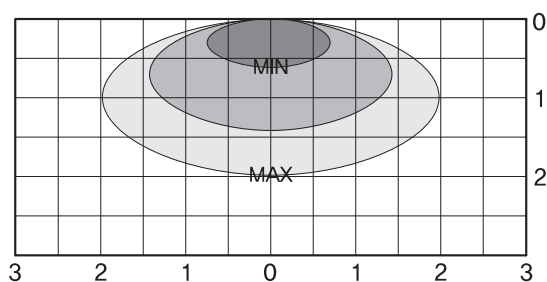

Technical Specifications

Power Supply	DC 12-30V / AC 12-24V
Microwave Module	24.150 ~ 24.250GHz
Contact Hold Time	1 second
Detection Area	4m(W) x 2m(D) (Height: 2.3m, Lowest Angle/Highest Sensitivity)
Current Consumption	42mA(DC12V, +25°C)
Contact Capacity	100mA 400V AC/DC
Max Installation Height	3.2m
Operating Temperature / Humidity	-40°C~85°C R.H. 0%~95%