



FT400

Activation

Highly versatile, multi-function, fob style automatic door remote control

Radio Frequency 2.4GHz



MULTIFUNCTION

4 functions: open, hold open, close & lock automatic doors.

VERSATILE

For pedestrian & industrial automatic doors along with gate & garage door activation.

COMPATABILITY

Seamlessly integrates with our AerWave touchless switch and WT-400 touch switch - all of which are all compatible with the small WR-24 receiver.

LONG-RANGE 2.4GHZ TRANSMISSION

Reliable operation up to 10 meters. Uses 1 x AAA battery (supplied). Battery life of 12 months based on 50 operations per day.

EASY TO INSTALL

Simple push button pairing of any number of FT400 remote controls to a WR-24 receiver.

SLEEK DESIGN

Modern, sleek fob style design for everyday use.



www.hotron.com


HOTRON

FT400

Activation


FT400 (Transmitter): Technical Specifications

Power Supply	1.5V x 1 (Size AAA battery)
Duration of Use	Approx 12 months (50 cycles a day)
Operating Frequency	2.4 GHz
Transmitting Distance	Up to 10m (when installed in steel structures: up to 2m)
Power Consumption	100mA Under
Operating Temperature	-20°C ~ 50°C, (-4°F to +122°F)
Dimensions	36 mm (W) x 79 mm (H) x 16 mm (D)

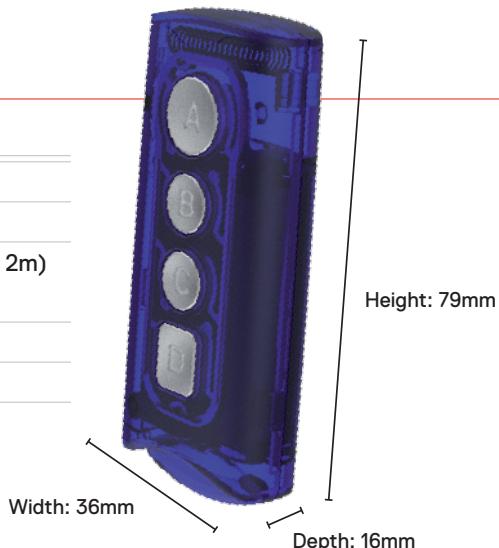


WR-24 (Receiver): Technical Specifications

Power Supply	DC 12~30V / AC 12~24V
Relay Contact Capacity	AC/DC 400V, 120mA
Receiving Frequency	2.4 GHz
Reception Sensitivity	-90 dBm
Power Consumption	100mA Under
Operating Temperature	-20°C to +50°C, (-4°F to +122°F)
Dimensions	99 mm (W) x 43 mm (H) x 21 mm (D)

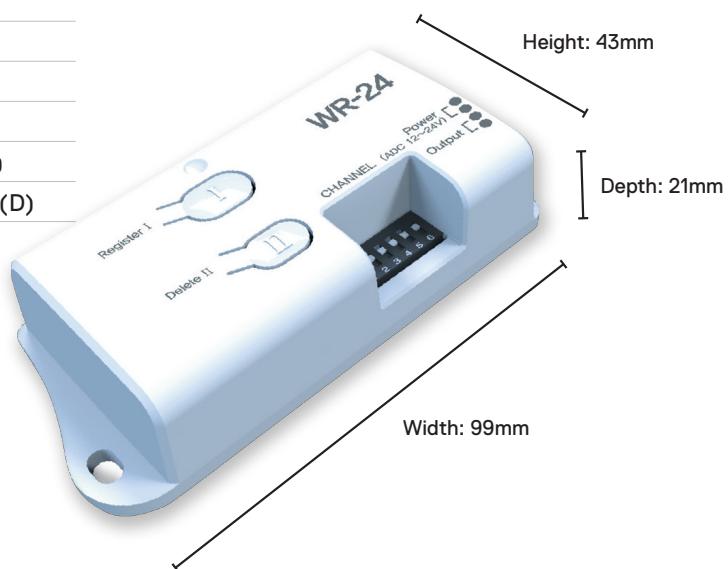

Multifunction

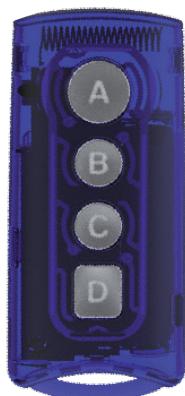

Button A: Open

Button B: Hold Open

Button C: Lock

Button D: Unlock